


SERIE GF/IB



Modelo No.	d Diámetro del hilo / mm	D (Max.) / mm	H (Max.) / mm	Max. Cap./cc.	W.G. / Gramo	Ciclo del Temporizador / seg.	Producción/ hora / Botella
IB-60-S1	80	100	150	950	75	20 - 30	120 - 180
IB-60-S2	56	75	110	280	37	16 - 28	250 - 450
IB-60-S3	46	65	100	100	25	12 - 24	450 - 900
IB-60-S4	38	50	100	80	18	10 - 20	720 - 1400
IB-60-S5	30	32	100	50	15	10 - 18	1000 - 1800
IB-60-S6	25	30	100	35	12	10 - 16	1200 - 2160
IB-60L-S1	80	100	190	950	75	20 - 30	120 - 180
IB-60L-S2	56	55	180	280	37	16 - 28	250 - 450
IB-60L-S3	46	40	180	100	25	12 - 24	450 - 900
IB-60L-S4	38	35	140	80	18	10 - 20	720 - 1400
IB-60L-S5	30	32	120	50	15	10 - 18	1000 - 1800
IB-60L-S6	25	30	110	35	12	10 - 16	1200 - 2160
IB-90-S1	95	120	180	1600	120	22 - 40	90 - 160
IB-90-S2	68	85	160	500	60	20 - 30	240 - 360
IB-90-S3	55	75	150	360	40	16 - 28	380 - 670
IB-90L-S4	50	55	175	260	30	12 - 24	600 - 1200
IB-90L-S5	43	45	160	120	25	10 - 20	900 - 1800
IB-90L-S6	38	40	160	100	20	9 - 20	1100 - 2400
IB-125-S1	115	180	180	3000	250	25 - 65	55 - 140
IB-125-S2	80	130	150	1200	125	22 - 40	180 - 320
IB-125-S3	65	130	150	700	80	20 - 30	360 - 540
IB-125-S4	57	100	150	600	60	18 - 28	500 - 800
IB-125-S5	52	85	150	400	50	17 - 27	670 - 1000
IB-125-S6	47	70	150	320	40	16 - 24	900 - 1350
IB-125-D8	40	85	140	200	30	12 - 18	1600 - 2400
IB-125-D10	36	70	140	200	25	12 - 18	2000 - 3000
IB-125-D12	33	60	140	150	20	12 - 18	2400 - 3200
IB-125L-S1	115	180	250	3000	250	25 - 65	55 - 140
IB-125L-S2	80	130	230	1200	125	22 - 40	180 - 320
IB-125L-S3	65	130	230	700	80	20 - 30	360 - 540
IB-125L-S4	57	100	230	600	60	18 - 28	500 - 800
IB-125L-S5	52	85	230	400	50	17 - 27	670 - 1000
IB-125L-S6	47	70	200	250	40	16 - 24	900 - 1350

IB-125Y/MP-D16	28HIPS	49	90	80	15	7 - 9	6400 - 8200
IB-230-S1	160	400	450	16" Globe	800	25 - 110	30 - 144

* Esta lista utiliza la tasa de contracción de moldeo y la gravedad específica de poliestireno (PS) como estándar. Esta lista es sólo para referencia y puede variar según el diseño del envase y las especificaciones. Bienvenida su consulta en cualquier momento.

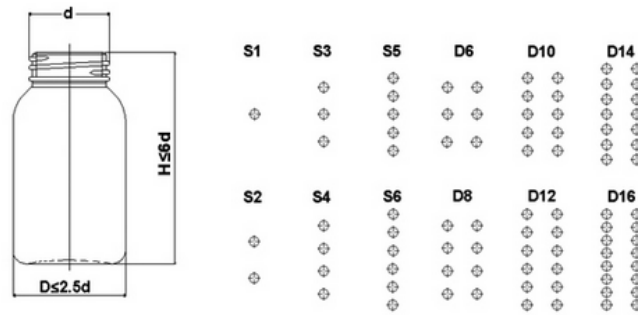

SERIE GF/ISB 					
Modelo No.	Cavidad	Diámetro Máximo de Hilo	Diámetro Máximo	Altura Máxima	Peso Máximo
GF/ISB-60	2	56	110	220	50
GF/ISB-60	4	38	90	220	25
GF/ISB-60	6	25	55	220	16
GF/ISB-60	8	20	40	120	12.5
GF/ISB-90	2	65	110	220	60
GF/ISB-90	4	45	90	220	30
GF/ISB-90	6	32	60	220	20
GF/ISB-90	8	20	40	120	15
GF/ISB-125	2	80	110	220	140
GF/ISB-125	4	66	90	220	70
GF/ISB-125	6	50	55	220	46
GF/ISB-125	8	20	40	120	35